



微型保险丝

MEF 快断微型保险丝



安全认证:

VDE	50mA - 6.3A
CSA Acceptance	50mA - 6.3A
UL Recognized	50mA - 6.3A
MITI	1A - 5A
SEMKO	50mA - 5A
CCC	50mA - 5A

电气特性:

额定电流	150%	210%	275%		400%		1000%
	MIN	MAX	MIN	MAX	MIN	MAX	MAX
50mA~5A	60 min	30 min	10 ms	3 sec	3 ms	300 ms	20 ms
6.3A	60 min	30 min	10 ms	5 sec	3 ms	300 ms	20 ms


分断能力:

35 amperes or 10 x rated current; whichever is greater at 250V AC

环境条件:

- 工作环境温度: -55°C to +125°C
- 冲击: MIL-STD-202, Method 213, Condition 1 (Saw tooth)
- 振动: MIL-STD-202, Method 201 (10-55Hz x 3axis/no load)
- 盐雾实验: MIL-STD-202, Method 101, Test Condition B (48Hrs)
- 绝缘电阻: MIL-STD-202, Method 302, Test Condition A (After Opening) 10,000 ohms minimum
- 可焊性: MIL-STD-202, Method 210, Test Condition F (10sec, at 260°C)
- 热冲击: MIL-STD-202, Method 107, Test Condition B (-65°C to at +125°C)

机械尺寸:

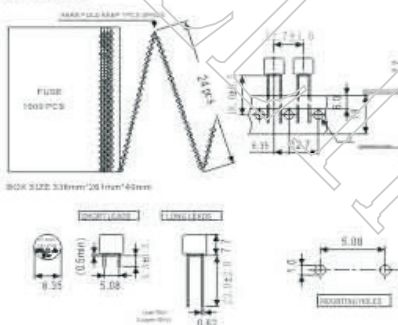


材料:


Base and Cap: Black thermoplastic, UL 94-V0
Pin: Tin-lead plated alloy

包装:

- In bulk: 1,000 pcs per box.
- On Tap: Ammo pack, 1,000 pcs box

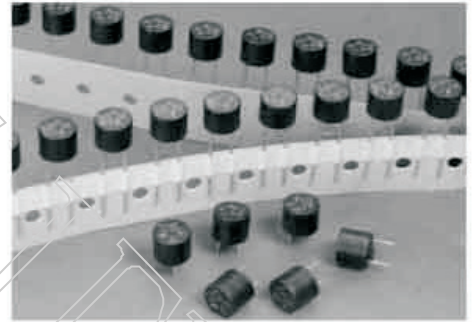

产品料号	额定电流 [In]	额定电压 (V)	公称冷电阻 (Ω)	最大电压降 (mv)	公称熔化热能 A ² Sec
MEF_050	50mA	250V	4.1970	650	0.000325
MEF_063	63mA		2.8020	500	0.001580
MEF_080	80mA		1.8650	400	0.003200
MEF_100	100mA		1.7410	350	0.005000
MEF_125	125mA		1.2620	350	0.006250
MEF_160	160mA		0.8290	330	0.007680
MEF_200	200mA		0.4850	300	0.024000
MEF_250	250mA		0.3670	250	0.043750
MEF_315	315mA		0.2720	230	0.059530
MEF_400	400mA		0.1940	210	0.080000
MEF_500	500mA		0.1290	170	0.083000
MEF_630	630mA		0.0960	150	0.119000
MEF_800	800mA		0.0720	130	0.192000
MEF_001	1A		0.0520	120	0.300000
MEF_1.25	1.25A		0.0430	120	0.468700
MEF_1.60	1.6A		0.0310	110	0.896000
MEF_002	2A		0.0260	110	1.200000
MEF_2.50	2.5A		0.0190	100	2.500000
MEF_3.15	3.15A		0.0140	100	3.969000
MEF_004	4A		0.0110	100	7.200000
MEF_005	5A	0.0083	90	15.000000	
MEF_6.30	6.3A	0.0061	80	47.628000	

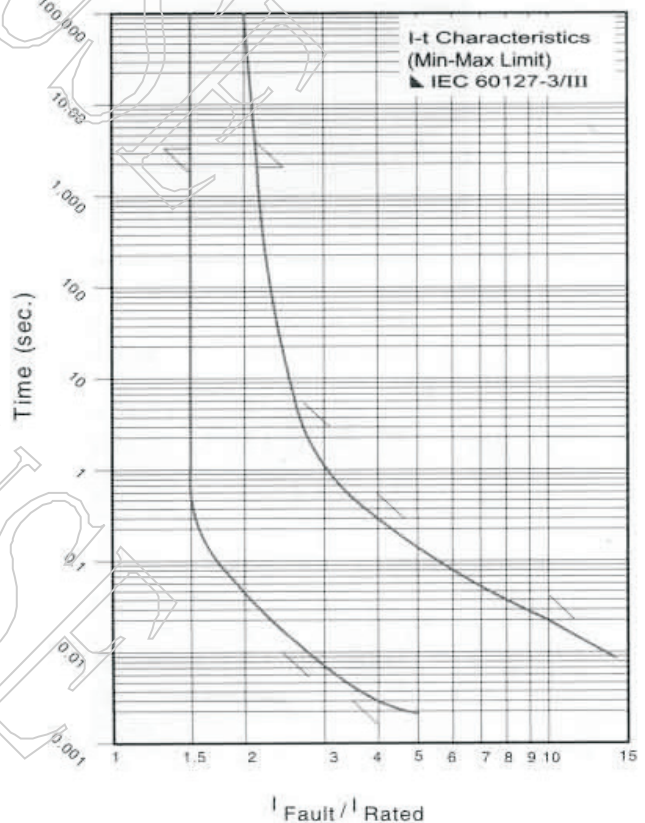

Specifications subject to change without notice