



微型保险丝

MSF 快断微型保险丝



安全认证:

VDE	50mA - 6.3A
CSA Acceptance	50mA - 6.3A
UL Recognized	50mA - 6.3A
MITI	1A - 5A
SEMKO	50mA - 5A
CCC	50mA - 5A

电气特性:

额定电流	150%		210%		275%		400%		1000%	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
50mA~5A	60	30	10	3	3	300	20			
	min	min	ms	sec	ms	ms	ms			
6.3A	60	30	10	5	3	300	20			
	min	min	ms	sec	ms	ms	ms			

分断能力:

35 amperes or 10 x rated current; whichever is greater at 250V AC

环境条件:

工作环境温度:

-55°C to +125°C

冲击:

MIL-STD-202, Method 213, Condition 1 (Saw tooth)

振动:

MIL-STD-202, Method 201 (10-55Hz x 3axis/no load)

盐雾实验:

MIL-STD-202, Method 101, Test Condition B (48Hrs)

绝缘电阻:

MIL-STD-202, Method 302, Test Condition A (After Opening) 10,000 ohms minimum


可焊性:

MIL-STD-202, Method 210, Test Condition F (10sec, at 260°C)

热冲击:

MIL-STD-202, Method 107, Test Condition B (-65°C to at +125°C)

机械尺寸:

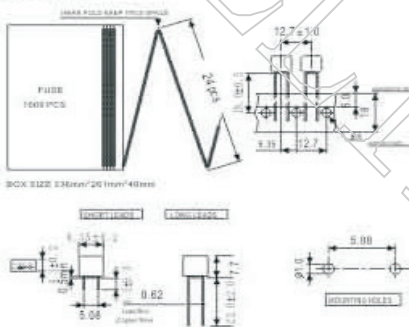


材料:


Base and Cap: Black thermoplastic

包装:

1. In bulk: 1,000 pcs per box.
2. On Tap: Ammo pack, 1,000 pcs box

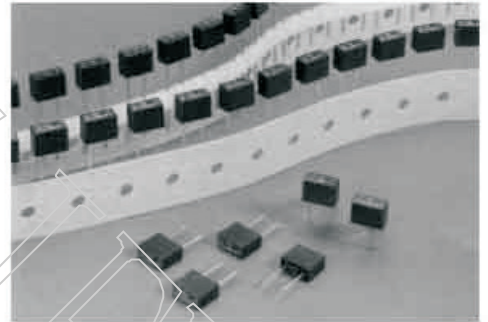

产品料号	额定电流 [In]	额定电压 (V)	公称冷电阻 (Ω)	最大电压降 (mv)	公称熔化热能 A ² Sec
MSF .050	50mA	250V	4.1970	650	0.000325
MSF .063	63mA		2.8020	500	0.001580
MSF .080	80mA		1.8650	400	0.003200
MSF .100	100mA		1.7410	350	0.005000
MSF .125	125mA		1.2620	350	0.006250
MSF .160	160mA		0.8290	330	0.007680
MSF .200	200mA		0.4850	300	0.024000
MSF .250	250mA		0.3670	250	0.043750
MSF .315	315mA		0.2720	230	0.059530
MSF .400	400mA		0.1940	210	0.080000
MSF .500	500mA		0.1290	170	0.083000
MSF .630	630mA		0.0960	150	0.119000
MSF .800	800mA		0.0720	130	0.192000
MSF 001	1A		0.0520	120	0.300000
MSF 1.25	1.25A		0.0430	120	0.468700
MSF 1.60	1.6A		0.0310	110	0.896000
MSF 002	2A		0.0260	110	1.200000
MSF 2.50	2.5A		0.0190	100	2.500000
MSF 3.15	3.15A		0.0140	100	3.969000
MSF 004	4A		0.0110	100	7.200000
MSF 005	5A		0.0083	90	15.000000
MSF 6.30	6.3A		0.0061	80	47.628000

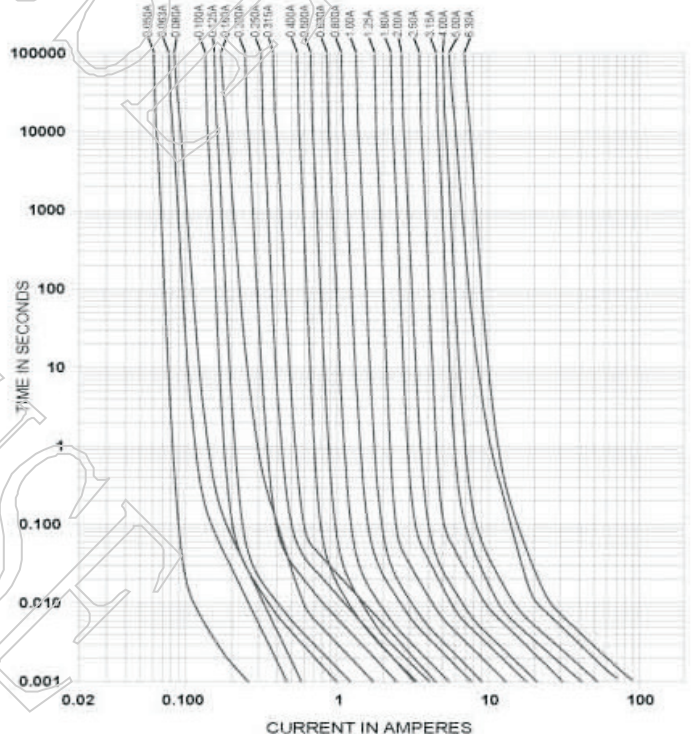

Specifications subject to change without notice