
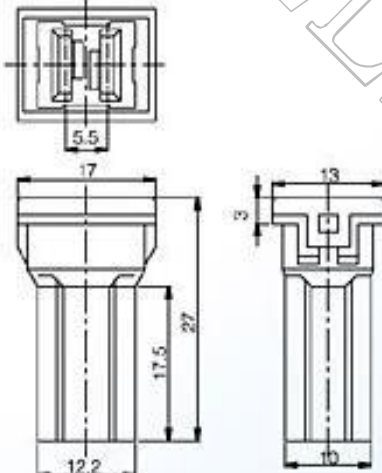

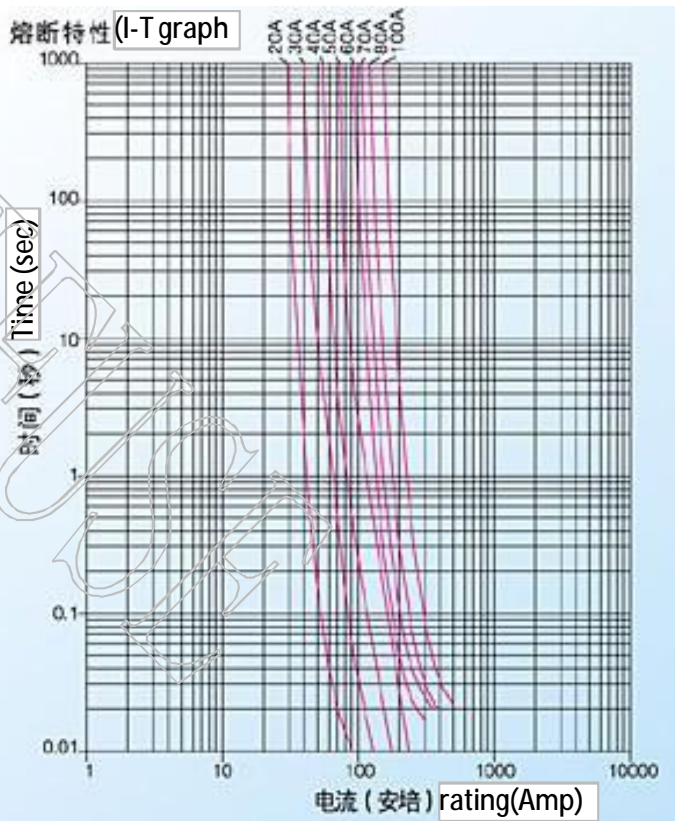


MODEL型号: FLF-M				Spec. 规格	17x13x27mm 20A-100A32V Square fuse			
Time-Current Characteristic(熔断特性): Time-Lag type				Standard(标准): JASO D614 QC/T420-2004				
				Functional Characteristics 电气特性				
				Testing current 测试电流		Blow time limit 熔断时间		
						Mix 最小	Max 最大	
				110%		4Hrs	—	
				200%		5sec	100sec	
350%		0.2sec	7sec					
600%		0.04sec	1sec					
根据使用状况，熔断特性可能改变								
				Safety Approvals 安全认证				
								
				Rohs compliance		Materials 材料		
				1. Case ----- PA66+GF 2. Fuse ----- Copper Alloy 3. Cap ----- PC 4. Chassis ----- Ceramic				
				Operating Temperature(工作温度) -40°C to +85°C (consider de-rating)				
Stock Conditions(储存条件)				+10°C to +60°C; Relative humidity ≤ 75% yearly average; Without dew, maximum value for 30 days-95%				
Reference information/参考信息								
Ampere rating 额定电流	Voltage rating 额定电压	COLOR 胶壳颜色	P/N 零件编号					
20A	≤ 32V	Light blue/浅蓝	FLF-M 20					
30A		Pink/粉红	FLF-M 30					
40A		Green/绿	FLF-M 40					
50A		Red/红	FLF-M 50					
60A		Yellow/黄	FLF-M 60					
70A		Brown/褐	FLF-M 70					
80A		Black/黑	FLF-M 80					
100A		Blue/蓝	FLF-M 100					

Specifications subject to change without notice

Tel: 0769-23067981 Fax: 0769-22602343 WWW.SELLIFUSE.COM sales@sellifuse.com