
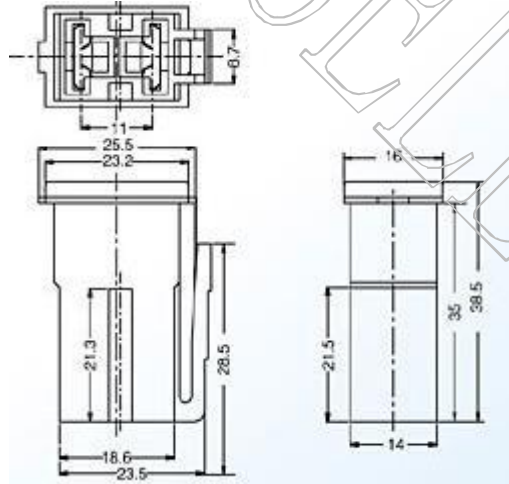

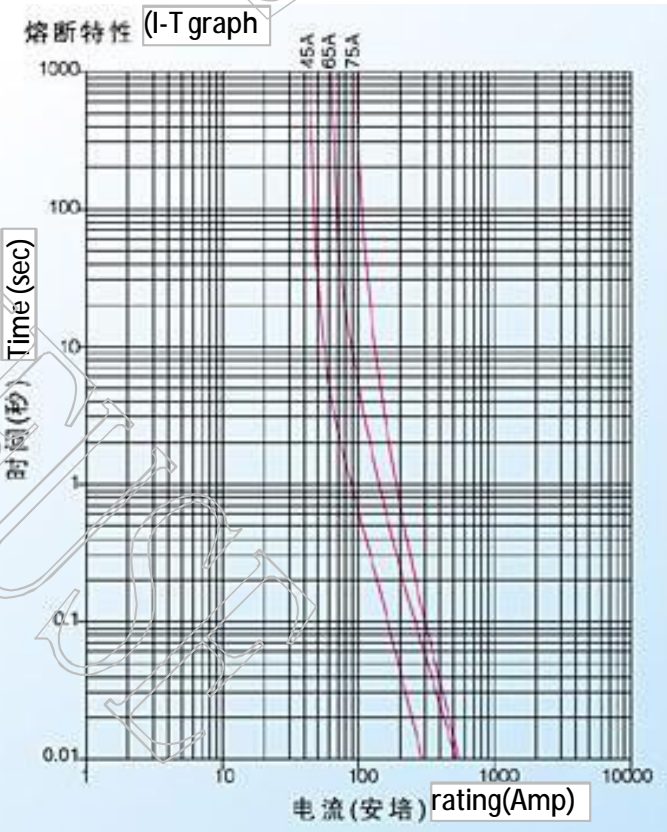


MODEL型号: FLM-KP				Spec. 规格	25.5x16x38.5mm 45A/65A/75A 32V Square fuse	
Time-Current Characteristic(熔断特性): Time-Lag type				Standard(标准): JASO D614		
				Functional Characteristics 电气特性		
				Testing current 测试电流	Blow time limit 熔断时间	
					Mix 最小	Max 最大
				110%	4Hrs	—
200%	2sec	60sec				
300%	0.2sec	7sec				
600%	0.04sec	1sec				
根据使用状况，熔断特性可能改变						
				Safety Approvals 安全认证		
						
				Rohs compliance		
				Materials 材料		
1. Case ----- PA66+GF				2. Fuse ----- Copper Alloy		
3. Cap ----- PC				4. Chassis ----- Ceramic		
Operating Temperature(工作温度)						
-40°C to +85°C (consider de-rating)						
Stock Conditions(储存条件)						
+10°C to +60°C; Relative humidity ≤ 75% yearly average; Without dew, maximum value for 30 days-95%						
Reference information/参考信息						
Ampere rating 额定电流	Voltage rating 额定电压	COLOR 胶壳颜色	P/N 零件编号			
45A	≤ 32V	Red/红	FLM-KP45			
65A		Black/黑	FLM-KP65			
75A		Grey/灰	FLM-KP75			

Specifications subject to change without notice

Tel: 0769-23067981 Fax: 0769-22602343 WWW.SELLIFUSE.COM sales@sellifuse.com