
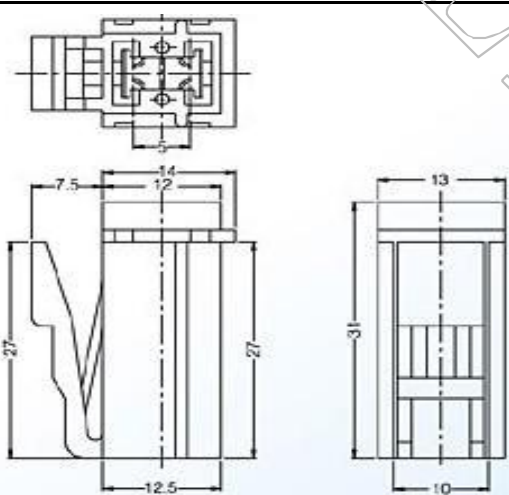

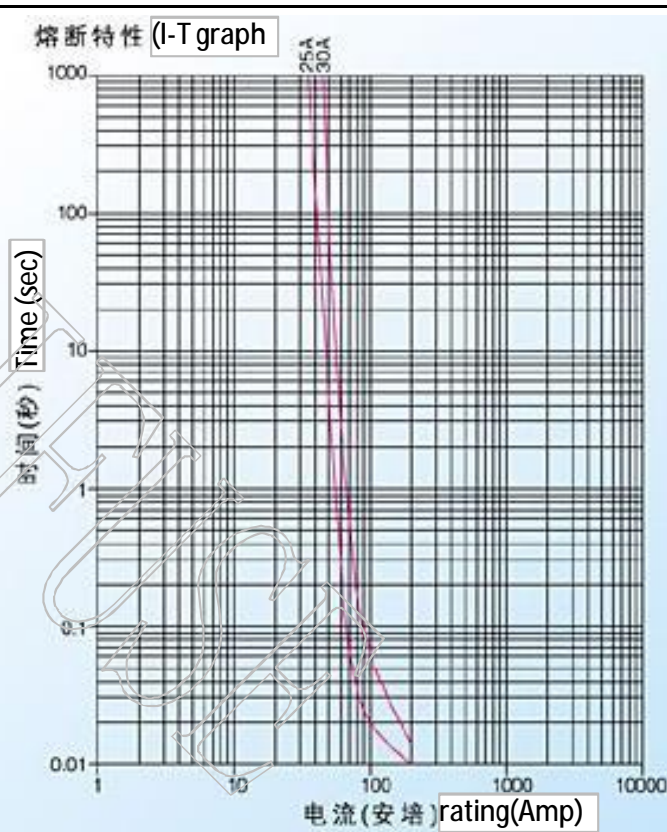


MODEL型号: FLM-NP				Spec. 规格	21.5x13x31mm 25A/30A32V Square fuse	
Time-Current Characteristic(熔断特性): Time-Lag type				Standard(标准): JASO D614		
				Functional Characteristics 电气特性		
				Testing current 测试电流	Blow time limit 熔断时间	
				Mix 最小	Max 最大	
				110%	/	
				200%	5sec / 70sec	
				300%	/ 6sec	
				600%	/ 3sec	
根据使用状况, 熔断特性可能改变						
				Safety Approvals 安全认证		
						
				Rohs compliance		
				Materials 材料		
				1. Case ----- PA66+GF		
				2. Fuse ----- Copper Alloy		
				3. Cap----- PC		
				4. Chassis----- Ceramic		
				Operating Temperature(工作温度)		
				-40°C to +85°C (consider de-rating)		
				Stock Conditions(储存条件)		
				+10°C to +60°C; Relative humidity ≤75% yearly average; Without dew, maximum value for 30 days-95%		
Reference information/参考信息						
Ampere rating 额定电流	Voltage rating 额定电压	COLOR 胶壳颜色	P/N 零件编号			
25A	≤32V	Brown/棕色	FLM-NP25			
30A		Green/绿	FLM-NP30			

Specifications subject to change without notice

Tel: 0769-23067981 Fax: 0769-22602343 WWW.SELLIFUSE.COM sales@sellifuse.com