

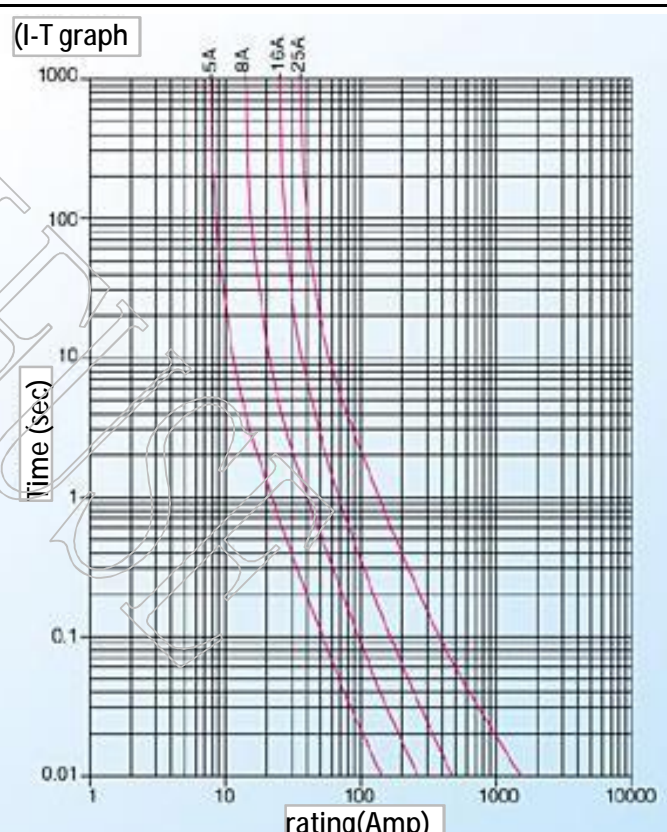


MODEL型号: GBC		Spec. 规格	25xD6mm 5A-30A32V europe fuse	
Time-Current Characteristic(熔断特性): Time-Lag type		Standard(标准): DIN72581		
Functional Characteristics 电气特性				
		Blow time limit 熔断时间		
		Testing current 测试电流	Mix 最小	Max 最大
		150%	1Hrs (小时)	— / —
		250%	— / —	60sec (秒)
可接受客户指定改用陶瓷材料/PPS 根据使用状况，熔断特性可能改变				
Safety Approvals 安全认证				
				
Rohs compliance				
Materials 材料				
1. chassis ----- bakelite 电木				
2. Fuse ----- Zn Alloy 锌合金				
Operating Temperature(工作温度)				
-40°C to +85°C (consider de-rating)				
Stock Conditions(储存条件)				
+10°C to +60°C; Relative humidity ≤75% yearly average; Without dew, maximum value for 30 days-95%				
Reference information/参考信息				
Ampere rating 额定电流	Voltage rating 额定电压	COLOR 壳颜色	P/N 件编号	
5A	≤32V	Yellow/黄	GBC 5	
8A		white/白	GBC 8	
16A		red/红	GBC 16	
25A		blue/蓝	GBC 25	
20A		Yellow/黄	GBC 20	
30A		Green/绿	GBC 30	
(I-T graph)				
				

Specifications subject to change without notice

Tel: 0769-23067981 Fax: 0769-22602343 WWW.SELLIFUSE.COM sales@sellifuse.com