


# FuseHolder Detail Specification

MODEL型号: PTF-45, PTF-50

Spec. 规格

For 5x20mm tube fuse/10A250VAC

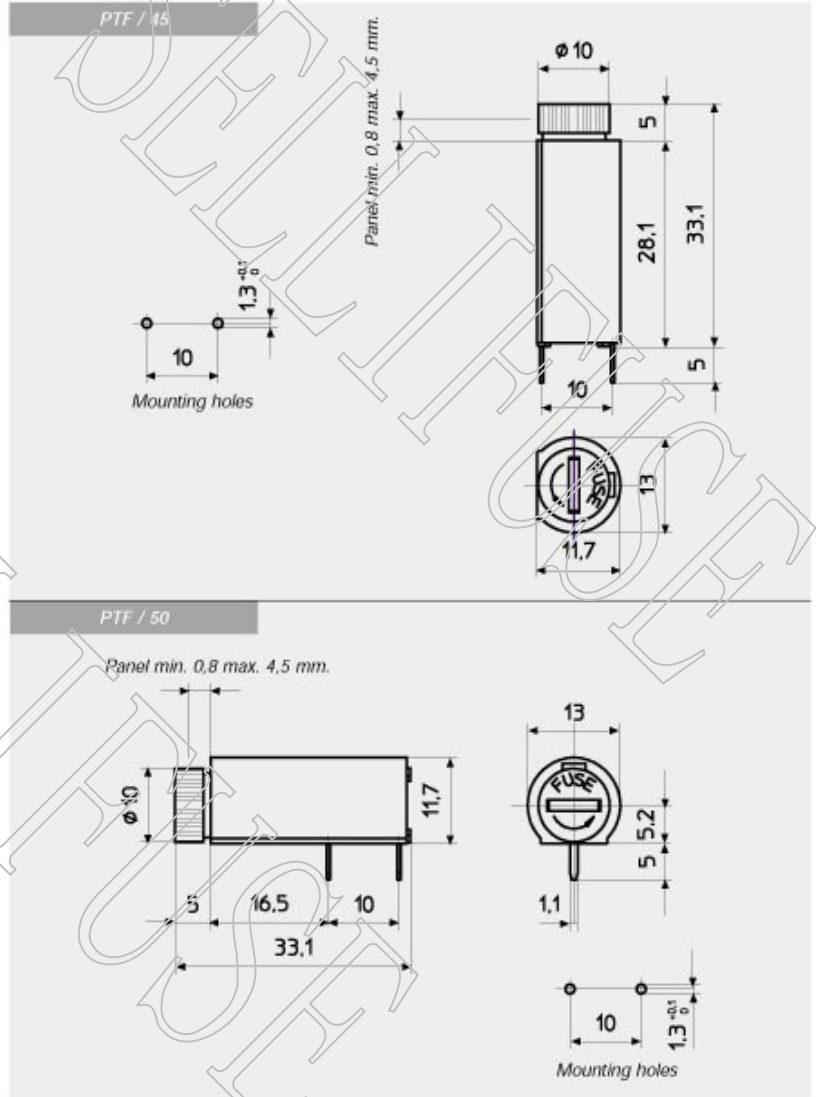


PER C.S.

FOR P.C.B.

POUR C.I.

FÜR LEITERPLATTE



| Corpo Isolante Nero      | Insulating body Black | Corps isolant Noir     | Isolierkörper Schwarz  | PBT UL 94 V0         |
|--------------------------|-----------------------|------------------------|------------------------|----------------------|
| Coperchio A baionetta    | Bayonet cover         | Couverture baionette   | Bajonettdeckel         |                      |
| Contatti                 | Contacts              | Contacts               | Kontakte               | CuZn 37 + Ni + Sn    |
| Foro di montaggio        | P.C.B. mounting hole  | Perçage C.I.           | Leiterplattenbohrung   | Ø 1,3 mm             |
| Categoria                | Class                 | Catégorie              | Baureihe               | PC2                  |
| Corrente nominale        | Nominal current       | Courant nominal        | Strombelastbarkeit     | 6,3 A                |
| Tensione                 | Voltage               | Tension                | Betriebsspannung       | 250 V                |
| Potenza dissipabile      | Operating power       | Puissance dissipable   | Ausgangsleistung       | 2,5 W                |
| Resistenza di contatto   | Contact resistance    | Résistance de contact  | Übergangswiderstand    | < 5 m Ω              |
| Resistenza di isolamento | Insulation resistance | Résistance d'isolement | Isolationswiderstand   | >10 <sup>8</sup> M Ω |
| Rigidità dielettrica     | Dielectric strength   | Rigidité dielectrique  | Durchschlagsfestigkeit | > 3000 Vac / 60 "    |

Specifications subject to change without notice

Dongguan Selli Technology and Circuits Protection Co, LTD

Tel: 0769-23067981 Fax: 0769-22602343 WWW.SELLIFUSE.COM sales@sellifuse.com